

BATCO 



FX SERIES

FIELD LOADERS

1535 | 1545 | 2045

SEE THE FX OF CHANGE ON THE BATCO FIELD LOADER.

The FX Series has been engineered for ease of maintenance, optimized containment and maximum speed. The FX Series is 50% faster than previous models reaching up to 9,000 bph for the 1500 Series and 14,000 bph for the 2000 Series. The optional heavy-duty mover tackles all terrains with ease and the modified hopper keeps grain where it needs to be - on the belt.

FEATURES

- Bearings are positioned for reduced exposure, easy maintenance and serviceability
- Optimized containment
- Powder coat paint for a durable, long lasting finish
- 12.5" discharge hood to accommodate capacity

1500 SERIES

FEATURES

- 15" wide belt, 10" tube diameter
- Available in 35' and 45' lengths
- Capacity up to 9,000 bu/hr


DRIVE OPTIONS

S-DRIVE

- Gas (optional soft start electric clutch)
- Electric

UNDER MOUNT S-DRIVE (FX1545 only)

- Gas drive standard with soft start electric clutch

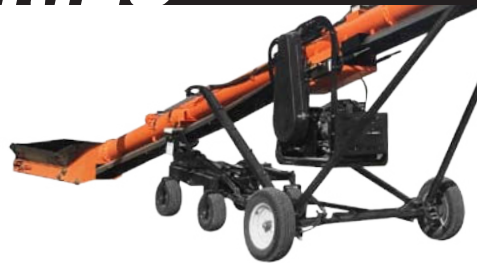

TOP DRIVE

- Hydraulic
- Electric

2000 SERIES

FEATURES

- 20" wide belt, 14" tube diameter
- Available in 45' length
- Capacity up to 14,000 bu/hr

DRIVE OPTIONS

S-DRIVE

- Gas
- Electric




OPTIONAL HEAVY-DUTY MOVER KIT

- Single lift cylinder with supported heavy-duty slider for added rigidity and stability
- Hydraulic joystick controlled 4-wheel steering for effortless maneuverability
- Spring loaded walking axles to keep tires on the ground
- 6.5" wide all-terrain tires for added floatation to allow the unit to ride over rough terrain

FX SERIES FIELD LOADER | SPECIFICATIONS

| MODEL | BELT LENGTH | WEIGHT (LBS) | UP-OPERATION | | | | DOWN-OPERATION | | | | WIDTH | HP GAS | Hyd Motor CU/IN Req. |
|------------------------|-------------|--------------|--------------|-------|-----|-----|----------------|--------|-----|-----|-------|--------|----------------------|
| | | | A | B | C | D | A | B | C | D | | | |
| FX 1535 TD - Electric | 83' 1" | 1660 | 17' | 15.4' | N/A | N/A | 10' | 16.6' | N/A | N/A | 7.5' | N/A | N/A |
| FX 1535 TD - Hydraulic | 83' 1" | 1660 | 16.75' | 16.8' | N/A | N/A | 18.2' | 14.7' | N/A | N/A | 7.5' | N/A | 6.2 (2000 SERIES) |
| FX 1545 | 107' 2" | 2305 | 20.8' | 21.6' | 12' | 14' | 8.8' | 22.1' | 14' | 16' | 7.5' | 32 HP | N/A |
| FX 1545 TD - Electric | 103' 1" | 1966 | 22.3' | 21' | N/A | N/A | 10.22' | 21.4' | N/A | N/A | 7.5' | N/A | N/A |
| FX 1545 TD - Hydraulic | 103' 1" | 1966 | 19.75' | 23' | N/A | N/A | 15.25' | 24.25' | N/A | N/A | 7.5' | N/A | 6.2 (2000 SERIES) |
| FX 2045 | 114' | 3775 | 20' | 23.5' | 11' | 13' | 13' | 25' | 14' | 16' | 8.4' | 35 HP | N/A |

"A" up-operation is conveyor discharge height (from bottom of discharge hood) at 30 degrees.
 "A" down-operation is overall conveyor height (from top of discharge hood)



Box 1750, Swift Current Saskatchewan, Canada S9H 4J8
 877.667.7421 | sales@batco-rem.com | batcomfg.com

Batco Conveyors. Belt to Last.

