



*Another dependable  
Innovation by*  
**Rem**

## REM Delta Flexible Harrows

### Which system is right for you?

- **Carts:** For seed-bed preparation, incorporation and pasture renovation

Delta Harrow Carts are built to last. They are available in sizes from 16' to 36'. Shipped complete with hydraulic cylinder and hoses, tires and jack stand. Optional hydraulic wing forward kit is available. Each cart features a heavy-duty clevis style hitch. Unique features include our adjustable "floating pull bars" to allow for superior ground hugging flexibility.

- **3 Point Hitch:** For turf or lawns, arenas, farms and ranches

These Handy attachments are available in widths from 4' to 14'. They feature lift bands, plated chain segments, and all necessary hardware. Each is shipped unassembled..

- **Drawbars:** For lawns, pastures, driveways, arenas and sports fields.

From 4' to 14' widths, the drawbar is the most economical choice. The Delta drawbars are heavy duty steel construction with Turnlock design, ideal for extreme tillage conditions.



### Rem Delta Flexible Harrow: the most effective, inexpensive tool for:

- **Residue Management:** Heavy Residue is quickly surfaced without clogging or bunching even in the most extreme no-till or ridge-till applications.
- **Hay or Pasture Land Management:** Studies prove that mechanically stimulating hay, pasture or forage land is the most cost-effective method of dramatically improving the hardiness and productivity


- of the plant. Scratching the surface covers open seed, assisting in germination and the establishment of new plants. Stimulating and spreading dead thatch assists in decomposition. This increases the speed at which nutrients are released into the area. Solid or liquid manure makes the surrounding grass unpalatable for livestock. Treatment with the Delta Flexible harrow maximises the fertiliser benefits of Existing droppings by encouraging decomposition, spreading nutrients, incorporating moisture, uncovering growth and aerating soil. Additionally, rodent mounds are effectively levelled.
- **Soil Preparation:** in combination with field cultivators, the Delta Flexible Harrow prepares a firm, level seed-bed or follows to pack and cover. Used alone it breaks up crust, ridges or stalks for minimum or no-till operations.
- **Chemical/Moisture Incorporation:** The various sizes of the Delta Flexible Harrow make it ideal for mounting behind your disk, field cultivator or applicator for one-pass applications. Low, wet areas dry more quickly when aerated by the Delta Flexible Harrow.
- **Surface Smoothing:** Arenas or playing fields become smooth and loosely packed, a safe surface for all activities. Set the tynes to fill holes and level, or to loosen soil and aid drying. Gravel roads or dirt paths are quickly maintained, dried and raked.
- **Turf Maintenance:** unmanaged turf becomes heavily thatched, preventing healthy growth from reaching its full potential. The delta flexible harrow stimulates growth buy surfacing the dead material, aerating the soil and strengthening the grasses.

## Sections

- 4, 6 & 10' Widths (8' 3" long)
- Flexible Two-Way design for optimum debris clearance
- Offset tynes eliminate ridges
- 120 points per 4' width
- 100% cold formed components eliminate tyne breakage
- Weighs 136lbs per 4' section

## Delta Flexible Harrow Section Features

Tyne Diameter .....	1/2"
Sample width x Length (feet) .....	4' x 8'
Total weight (lbs).....	33
Points per section.....	108
Horse power requirement .....	6

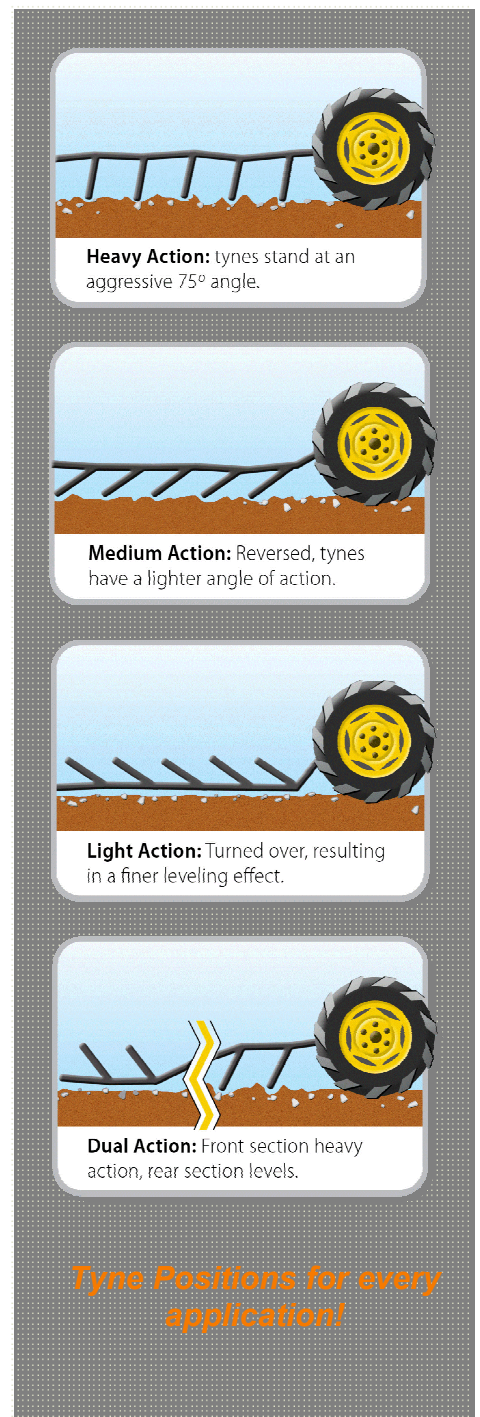

## Delta Flexible Harrow 3 Point Attachment Features

3 Point Width	Weight (lbs)	HP Requirement
4'	186	6
6'	200	9
8'	211	12
10'	225	15
12'	270	18
14'	300	21

## Delta Flexible Harrow Turnlock Drawbar Features

Drawbar Width	Weight (lbs)
4'	18
6'	27
8'	36
10'	45
12'	54
14'	63

## Delta Flexible Harrow Turnlock Drawbar Features

Cart Width	Weight (lbs)	HP Requirement
16'	1575	40
20'	1675	50
24'	1725	60
28'	1790	70
32'	1965	80
36'	2565	90

## Delta Rotary Harrow Features

Drawbar Width	# of Tynes	Weight lbs	HP Requirement
5'	16	420	30
6'	20	460	40
7'	24	500	50
8'	24	540	60